


# J2 PET Edge Lock Baffle - Straight

## PRODUCT DATA AND SPECIFICATIONS

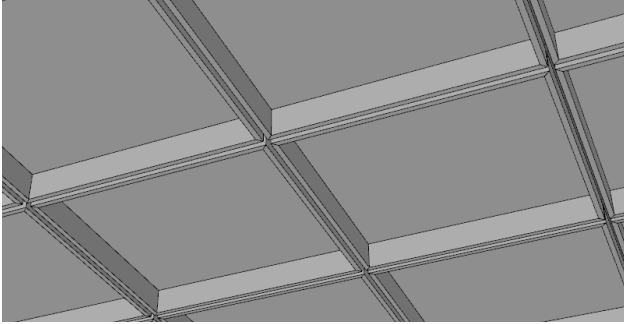

J2 PET Acoustic Edge Lock Baffles are designed to elevate and enhance T-grid drop ceilings with simple and non-invasive installation. Our ceiling systems are made of J2 PET Acoustic Felt.

- ✓ Eco-friendly
- ✓ Durable
- ✓ Hard-wearing
- ✓ 34 Color Options

**STYLE:** Drop-in T-Grid Baffle Tile

**COMPOSITION:** 100% PET (>75% recycled PET material)

**DENSITY:** 1900g/sqm-2400g/sqm (approx 12pcf)

**DIMENSIONS:** Thickness: 0.5in (12mm), Height: 6in, Designed for 2ft x 2ft grid

**FIRE RATING:** ASTM E84 – Class B (Class A available on request, color options may vary)

**ACOUSTIC NRC:** All acoustic panel systems offer diverse sound absorption characteristics. Similar baffle system tests have shown an NRC of between 0.65-0.85, however not all systems have been tested for NRC ratings.


**APPLICATION:** T-Grid Ceiling

**CLEANING & CARE:** Remove dust and dirt by dusting, vacuuming, or with a soft cloth or sponge and a solution of carpet or upholstery shampoo. Use a soft, damp cloth and blot dry. Spot cleaner can be used for lightly soiled areas.

**WARRANTY:** 4-year warranty against workmanship and manufacturing defects.

**HARDWARE & INSTALLATION:** The baffle tiles are directly mounted to steel T-grid ceiling rails. The tension of the single-piece construction retains the tile in place.

### PRODUCT DIAGRAMS:

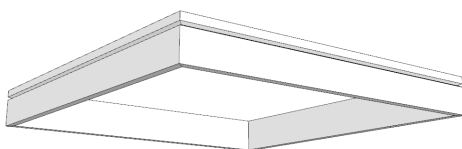

Isometric View

