


J2 PET Edge Lock Baffle - Switch

PRODUCT DATA AND SPECIFICATIONS

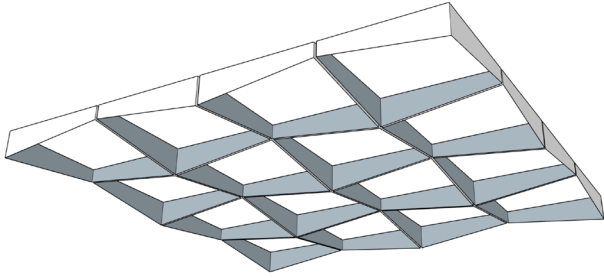

J2 PET Acoustic T-Grid Baffles are designed to elevate and enhance T-grid drop ceilings with simple and non-invasive installation. Our ceiling systems are made of J2 PET Acoustic Felt.

- ✓ Eco-friendly
- ✓ Durable

- ✓ Hard-wearing
- ✓ 34 Color Options

STYLE: Drop-in T-Grid Baffle Tile

COMPOSITION: 100% PET (>75% recycled PET material)

DENSITY: 1900g/sqm-2400g/sqm (approx 12pcf)

DIMENSIONS: Thickness: 0.5in (12mm), Height: 6in, Designed for 2ft x 2ft grid

FIRE RATING: ASTM E84 – Class B (Class A available on request, color options may vary)

ACOUSTIC NRC: All acoustic panel systems offer diverse sound absorption characteristics. Similar baffle system tests have shown an NRC of between 0.65-0.85, however not all systems have been tested for NRC ratings.

APPLICATION: T-Grid Ceiling

CLEANING & CARE: Remove dust and dirt by dusting, vacuuming, or with a soft cloth or sponge and a solution of carpet or upholstery shampoo. Use a soft, damp cloth and blot dry. Spot cleaner can be used for lightly soiled areas.

WARRANTY: 4-year warranty against workmanship and manufacturing defects.

HARDWARE & INSTALLATION: The baffle tiles are directly mounted to steel T-grid ceiling rails. The tension of the single-piece construction retains the tile in place.

PRODUCT DIAGRAMS:

