


J2 PET Felt Acoustic Drop-In Baffle Tile

PRODUCT DATA AND SPECIFICATIONS

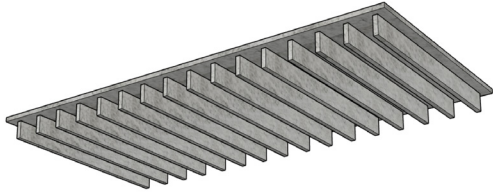

With J2 PET Felt Acoustic Drop-In Baffle Tiles, t-grid ceilings don't need to be boring. Designed to fit into standard 2'x2' and 2'x4' ceiling grids, installation is simple and familiar.

- ✓ Eco-friendly
- ✓ Durable

- ✓ Hard-Wearing
- ✓ 34 Color Options

STYLE: Drop-in Ceiling Tile

COMPOSITION: 100% PET (>75% recycled PET material)

THICKNESS: 12mm

DENSITY: 1900g/sqm-2400g/sqm (approx 12pcf)

DIMENSIONS: 2x2: 23.69in x 23.69in x 2.5in, 2x4: 23.69in x 47.69in x 2.5in (custom blade heights are available)

FIRE RATING: ASTM E84 – Class B (Class A panels available on request)

ACOUSTIC NRC: All acoustic panel systems offer diverse sound absorption characteristics. Similar cloud systems have an NRC of between 0.65-0.90, however not all systems have been tested for NRC ratings.

APPLICATION: Drop-in or direct ceiling mount

HARDWARE & INSTALLATION: Tiles are provided in 2x2 or 2x4 formats, and can be placed in standard 9/16in and 15/16in t-grid ceilings. Ceiling grid hardware is not included. Some assembly of the individual ceiling tiles is required.

WARRANTY: 4-year warranty against workmanship and manufacturing defects

PRODUCT DIAGRAMS:

