

J2 PET Felt Geo Panel

PRODUCT DATA AND SPECIFICATIONS



The J2 PET Felt Geo Panel takes acoustic performance to the next level while retaining the style, versatility and texture of felt. An optional composite construction with a one inch fiberglass absorber panel is available for enhanced effectiveness.

- ✓ Various Thicknesses
- ✓ Built-in Air Gap
- ✓ Various Sizes
- ✓ 34 Color Options

COMPOSITION: 100% PET shell (>75% recycled PET material), optional insert of resin-bonded borosilicate glass fiber

THICKNESS: 1.5" or 2" standard, custom thickness available

DENSITY: J2 PET Felt: 1900g/sqm-2400g/sqm (approx 12pcf)
Optional Fiberglass Insert: 6-7 PCF

DIMENSIONS: Standard sizes:
9" x 9" | 18" x 18" | 36" x 36" | 36" x 18" | 36" x 9" | 18" x 9"

FIRE RATING: ASTM E84 – Class B

ACOUSTIC NRC: Geo Panel in 1.5" and 2" thicknesses with an air gap have an NRC of 0.66. With the optional 1" fiberglass insert, the NRC is 0.95.


APPLICATION: Wall mount

HARDWARE & INSTALLATION: Geo Panels can be attached directly to wall substrates via construction adhesives or fasteners. For larger panels with fiberglass insert impaling clips or z-clips may be required to secure panel while adhesive cures.

CLEANING & CARE: Remove dust and dirt by dusting, vacuuming, or with a soft cloth or sponge and a solution of carpet or upholstery shampoo. Use a soft, damp cloth and blot dry. Spot cleaner can be used for lightly soiled areas.

WARRANTY: 4-year warranty against workmanship and manufacturing defects.

PRODUCT DIAGRAMS:

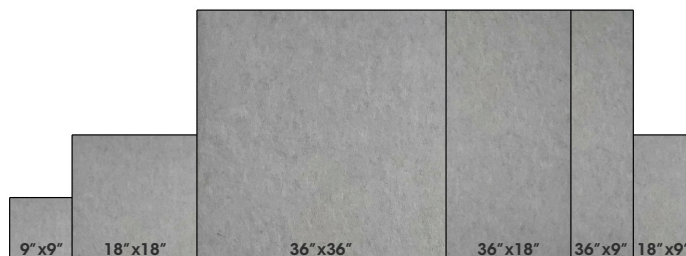

Standard Sizes

1/8" Bevel Square
Corner Options



Isometric View



Cross-Section Views