
J2 PET Felt Single Switch Baffle

PRODUCT DATA AND SPECIFICATIONS



J2 PET Acoustic Felt Baffles are designed to trap noise and reverberation while adding style and substance to overhead spaces. Our ceiling systems are made from J2 PET Acoustic Felt.

- ✓ Eco-friendly
- ✓ Hard-Wearing

✓ Durable

✓ 34 Color Options

STYLE: Suspended Ceiling Baffle

COMPOSITION: 100% PET (>75% recycled PET material)

THICKNESS: 9mm, 12mm, and 24mm (double layer 12mm) available on request

DENSITY: 1900g/sqm-2400g/sqm (approx 12pcf)

DIMENSIONS: Blade length up to 8ft, customizable blade height

FIRE RATING: ASTM E84 - Class B (Class A panels availabe on request, color options may vary)


ACOUSTIC NRC: Up to 0.75, depending on mounting method and configuration

APPLICATION: Ceiling

HARDWARE & **INSTALLATION:** Baffles are suspended using aircraft cable connected to cable adjusters. Each baffle includes two (2) 5ft lengths of 1/16" cable and cable adjusters. Hardware options include two (2) u-channel mounting brackets, (1) continuous bracket, or directly-attached studs. Due to varying ceiling layouts and substrates, contractor is required to supply ceiling mounting hardware. Specific hardware is available upon request.

WARRANTY: 4-year warranty against workmanship and manufacturing defects.

PRODUCT DIAGRAM:

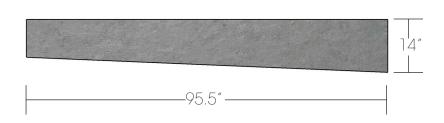

*Standard size shown. Height and length are customizable.







