


# J2 PET Felt T-Grid Baffle

## PRODUCT DATA AND SPECIFICATIONS

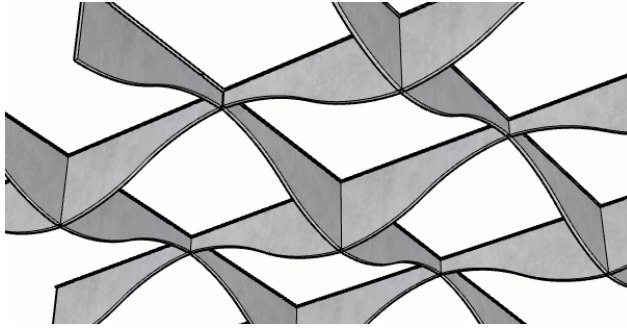

J2 PET Acoustic T-Grid Baffles are designed to elevate and enhance T-grid drop ceilings with simple and non-invasive installation. Our ceiling systems are made of J2 PET Acoustic Felt.

- ✓ Eco-friendly
- ✓ Durable

- ✓ Hard-wearing
- ✓ 34 Color Options

**STYLE:** Magnetic Ceiling Baffle

**COMPOSITION:** 100% PET (>75% recycled PET material)

**DENSITY:** 1900g/sqm-2400g/sqm (approx 12pcf)

**DIMENSIONS:** Thickness: 0.5in (12mm), Height: 9.5in, Length: 23.5in (custom sizes available)

**FIRE RATING:** ASTM E84 – Class B (Class A available on request, color options may vary)

**ACOUSTIC NRC:** All acoustic panel systems offer diverse sound absorption characteristics. Similar baffle system tests have shown an NRC of between 0.65-0.85, however not all systems have been tested for NRC ratings.

**APPLICATION:** Ceiling

**CLEANING & CARE:** Remove dust and dirt by dusting, vacuuming, or with a soft cloth or sponge and a solution of carpet or upholstery shampoo. Use a soft, damp cloth and blot dry. Spot cleaner can be used for lightly soiled areas.

**WARRANTY:** 4-year warranty against workmanship and manufacturing defects.

**HARDWARE & INSTALLATION:** Baffles are directly mounted to steel T-grid ceiling rails using magnetic fasteners. The fasteners come pre-installed in each baffle and snap to the face of the T-grid rail. Once snapped into place, the baffle can be aligned manually.

### PRODUCT DIAGRAMS:

